

B.Tech I Year (R13) Supplementary Examinations December 2017

ENGINEERING MECHANICS

(Common to CE and ME)

Time: 3 hours


Max. Marks: 70

PART – A


(Compulsory Question)

1 Answer the following: (10 X 02 = 20 Marks)

- State the principle of transmissibility of forces.
- A force of 15 N is applied perpendicular to the edge of a door 0.8 m wide as shown in figure below. Find the moment of the force about the hinge.

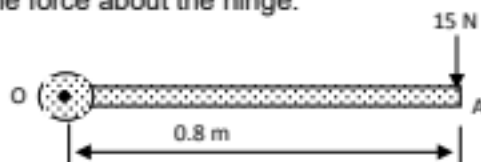

- List the two types of dynamic friction.
- Coefficient of friction between screw and nut in a screw jack is 0.15. Determine the angle of friction.
- Locate the centroid of the lamina shown in figure below.

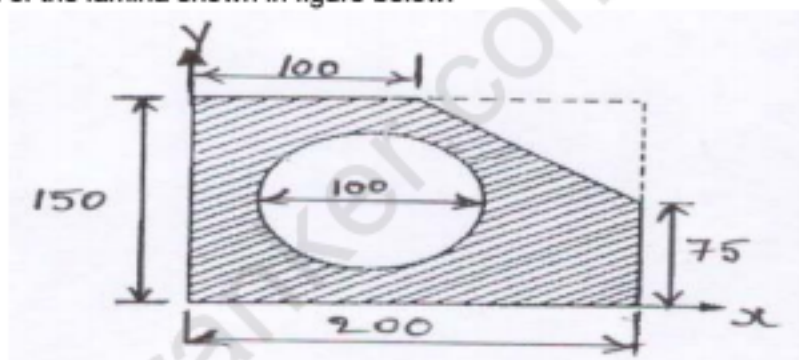


- State perpendicular axis theorem with simple sketch.
- A body is moving with a velocity of 3 m/s. After five seconds the velocity of the body becomes 13 m/s. Find the acceleration of the body.
- A lift carries a weight of 100 N and is moving with a uniform acceleration of 2.45 m/s^2 . Determine the tension in the cables supporting the lift when the lift is moving upwards.
- List any two assumptions made in the analysis of frames.
- A simple harmonic motion is defined by the expression $a = -15s$. Determine its period and frequency.

PART – B

(Answer all five units, 5 X 10 = 50 Marks)

UNIT – I

2 A 40 kg cylinder is held in position on an inclined plane by means of a wire as shown in figure below. Determine reaction at surface of inclined plane and tension in the wire.

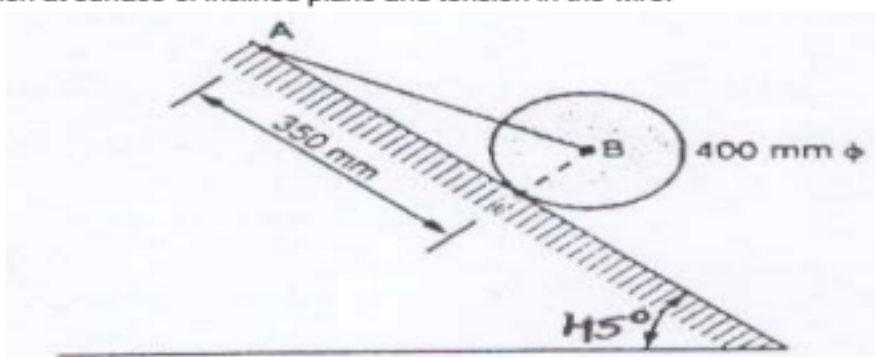


OR

Contd. in page 2


Code: 13A01101

R13

- 3 Replace the system of forces and couple as shown in figure below, by a single force couple system at A.

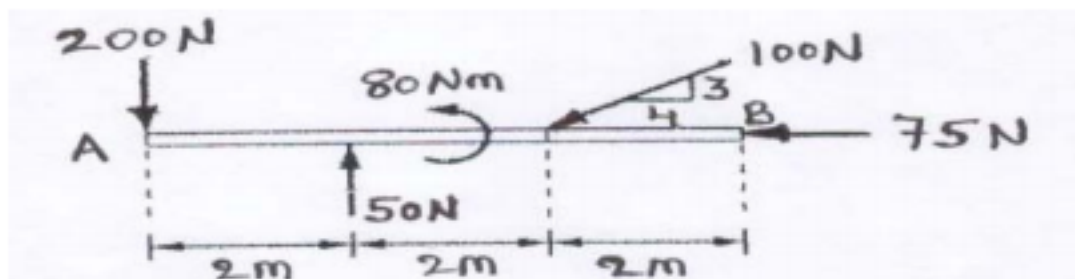

UNIT - II

- 4 Two blocks A and B of weights 1 kN and 2 kN, respectively are in equilibrium position as shown in figure below. If coefficient of friction between the two blocks as well as the block B and the floor is 0.3, find the force P required to move the block B. Also find the force in the string.

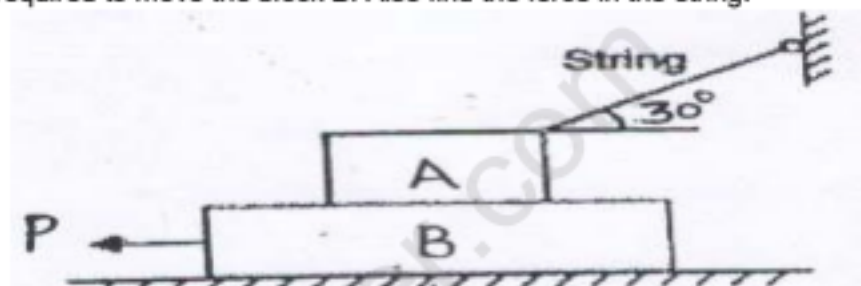


OR

- 5 A block placed over a 100 wedge on a horizontal floor and leaning against a vertical wall as shown in figure below and weighing 1500 N is to be raised by applying a horizontal force to the wedge. Assuming co-efficient of friction between all the surfaces in contact to be 0.3, determine the minimum horizontal force to be applied to raise the block.

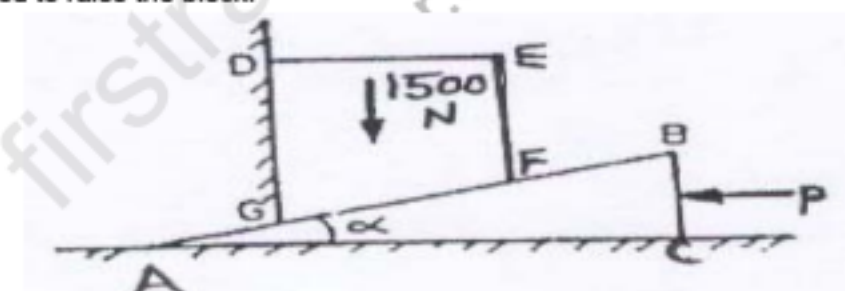
UNIT - III


- 6 Calculate the moment of inertia about horizontal and vertical axes (I_{xx} and I_{yy}) of the section show in figure below.

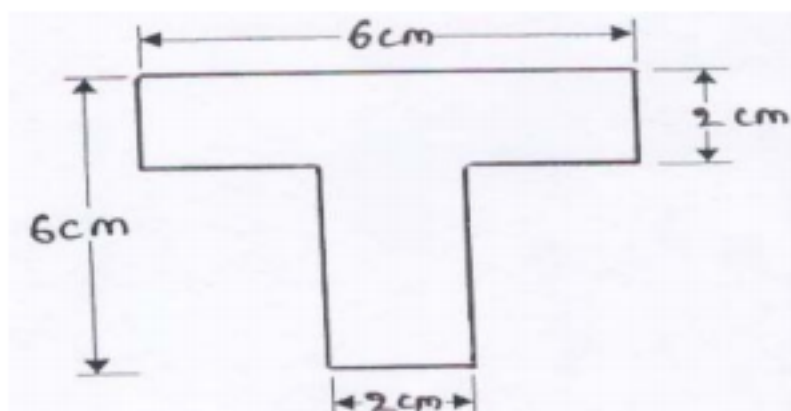

OR

Contd. in page 3


- 7 Find the moment of inertia of the shaded area shown in the figure below about the axis AB.

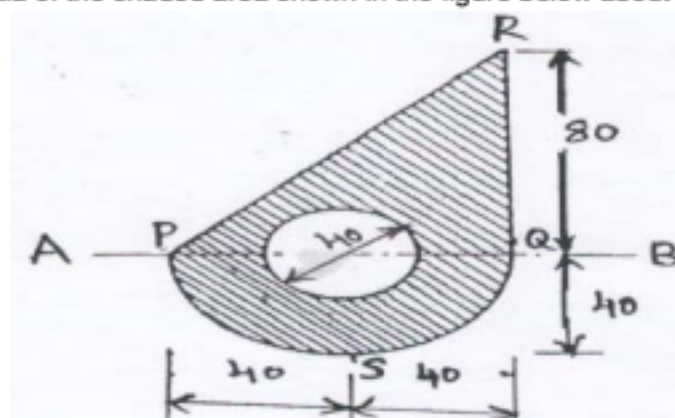
UNIT - IV


- 8 A car starts from rest and accelerates uniformly to a speed of 80 km/hour over a distance of 500 meters, calculate the acceleration and time taken. If a further acceleration raises the speed to 96 km/hour in 10 seconds, find the acceleration and further distance moved. The brakes are now applied and the car comes to rest under uniform retardation in 5 seconds. Find the distance travelled during braking.

OR

- 9 Two blocks shown in figure below, have weight $A = 8\text{ N}$ and $B = 10\text{ N}$ and coefficient of friction between the block A and horizontal plane, $\mu = 0.2$. If the system is released, from rest and the block A falls through a vertical distance of 1.5 m, what is the velocity acquired by it? Neglect the friction in the pulley and extension of the string.

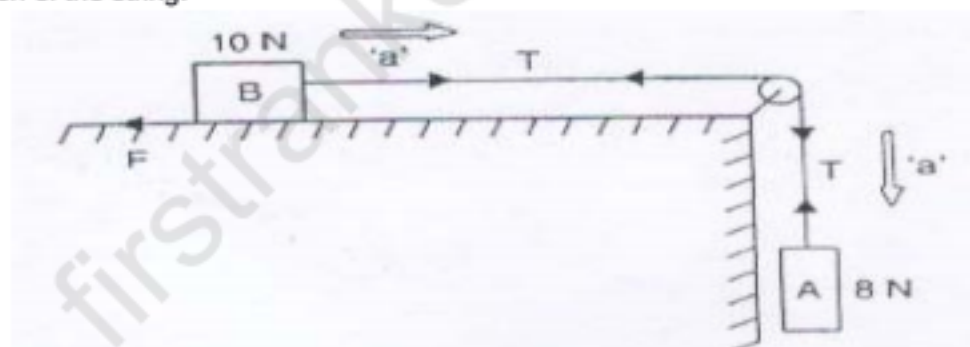
UNIT - V

- 10 Determine the forces in all the members of the frames shown in figure below. Indicate the nature of the forces also.

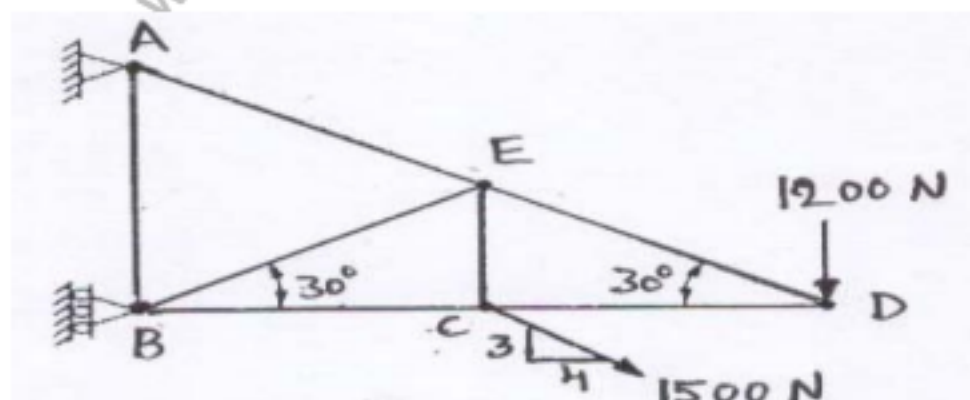

OR

- 11 A particle is in simple harmonic motion. Its maximum velocity was 6 m/sec and the maximum acceleration was found to be 12 m/sec^2 . Determine its angular velocity, amplitude. Also determine its velocity and acceleration when displacement is half the amplitude.
