[P.T.O.

with its equation

Write any two methods to analysis continues beam

Derive the shape factor of Rectangle

Define distribution factor

hinged arch?

How we determine the horizontal thrust for two

Define shape factor

-	Printed Pages: 7	NCE-504
•	(Following Paper ID and Answ	(Following Paper ID and Roll No. to be filled in your Answer Books)
	Paper 1D 2289540	Roll No.
	В.	в.тесн.
	Regular Theory Examination (Odd Sem-	nation (Odd Sem-V), 2016-17
	STRUCTUR.	STRUCTURAL ANALYSIS-II
	Time: 3 Hours	Max. Marks: 100
	SEC	SECTION-A
	Note: Attempt all the questions	ions
	1. Attempt all question	Attempt all questions. All carries equal marks.
		(10×2=20)
	a) Distinguish be-	Distinguish between Flexibility method and
	stiffness method	

NNNFIISIR



(2)

FIG 1

L 9 What is relative stiffness? Write relative stiffness Explain Muller Breslau principle

NCE-504

NCE-504

on a cable of suspension bridge? What is the maximum tension and minimum tension

of continues beam

What is plastic hinge?

SECTION-B

Attempt any Five questions

(5×10=50)

BMD. Analyse the following continues beam (fig.1) using the flexibility method of matrix analysis. Draw

೦

A foot bridge is carried over a river of span 90m.

FIG 2

60kN/m 4m -(Constant : EI) **~** 100kN 3m -

If the horizontal deck is located by UDL of 20

point of the cable. Determine the length of the cable.

The supports are 3m and 12m higher than the lowest

KN/M, find the tension in the cable

ড 20 kN/m 4m distribution method. EI is constant continuous beam shown in fig.2. Using moment Draw the bending moment diagram for the 2m 4m 8 2 3 120 KN 6m

MANIFIELL

504/12/2016/9260

 \mathfrak{S}

[P.T.O.

4

normal thrust at any given section for a typical twobending moment at any section, radial shear and hinged symmetrical parabolic arch.

<u>a</u>

Draw the schematic diagrams for horizontal thrust,

NCE-504

NCE-504

ဇ Define shape factor and obtain its value for the fig.3 if the yield stress is 250 N/mm². Find M_p. T - section with the following dimension shown in


- 120mm -20mm

120mm

Ð supported beam. Using the ILD, determine the Derive the influence diagram for reactions and support reactions and find bending moment at 2m, 4m and 6m for a simply supported beam of span bending moment at any section of a simply and 5 KN placed at 1 m, 4.5 m and 6.5 m respectively 8m subjected to three point loads of 10 KN, 15 KN

Determine the plastic moment capacity Mp for the frame shown in Fig 4 given below

8

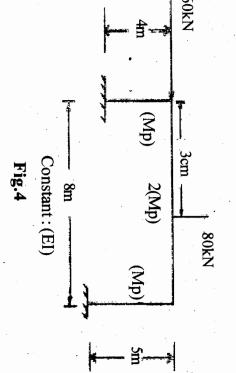

MANIFIES

504/12/2016/9260

5

9

NCE-504

Section - C

4

Analyze the beam given in Fig.5 by slope deflection

NCE-504

method and draw its bending moment diagram and shear

Attempt Any two questions

A three hinged stiffening girder of suspension bridges of

ယ

span 100 m is subjected to two pt. loads of 200 KN and


300 KN at the distance of 25m and 50m from the left

girder at a distance 30 m from left end. If supporting cable end. Find the shear force and bending moment for the

rigidity.

has the central dip of 10m, find the maximum tension in

the cable.

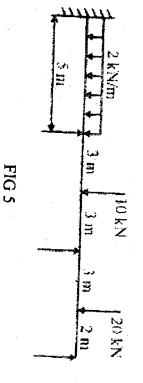

 $(2\times15=30)$

force diagram.

Develop the flexibility matrix for the cantilever with

'n

coordinate as shown in figure, take uniform flexural

 \mathbf{C} U B

MANIFIELL

504/12/2016/9260

(7)