

(c) Draw polar plot for  $G(s) = K / (sA + 1)^*(sB+1)$  for unity feedback system, find Gain margin, phase margin.

5 Attempt any two of the following :  $10 \times 2 = 20$

(a) Draw bode plot and determine G.M., P.M., comment on stability.

$$G(s)H(s) = 16(1+0.5s) / s^2 * (1+0.125s) * (1+0.1s)$$

(b) Explain the Proportional, Derivative, Integral controller and write their advantages.

(c) construct root locus for

$$G(s)H(s) = k/s * (s+4) * (s+5) \quad K > 0$$

Printed Pages : 4



NEE-409

(Following Paper ID and Roll No. to be filled in your Answer Book)

PAPER ID : 121413

Roll No.

--	--	--	--	--	--	--	--	--	--	--	--

B. Tech.

(SEM. IV) THEORY EXAMINATION, 2014-15  
ELECTRIC MACHINE & AUTOMATIC CONTROL

Time : 3 Hours]

[Total Marks : 100

1 Attempt any four of the following :  $4 \times 5 = 20$

(a) Explain the different speed control methods used in a DC motor.

(b) Discuss conversion from 3 phase to 2 phase using Scott connection.

(c) Briefly enumerate the working of auto transformer with its merits, demerits.

(d) A 10 kva single phase 500/250 v transformer gave following test.

OC TEST	250 V	3 A	200W
SC TEST	15V	30A	300W

Find efficiency and regulation at full load 0.8 p.f. Lagging ?

121413]

4

[ 21275 ]

121413]

1

[ Contd...

- (e) Why series motor is never start on no load, also explain application of DC series and shunt motor.
- (f) Why starter is required in DC motor ? Explain different method of starting.

2 Attempt any two of the following :  $10 \times 2 = 20$

- (a) (i) Explain the working principle of 3-phase induction motor. The rotor of induction motor cannot run at synchronous speed. Explain. Why ?
- (ii) 3- $\phi$  induction motor is wound for 4 poles and is supplied from 50 Hz system. Calculate
- (a) synchronous speed
- (b) rotor speed when slip is 4% and
- (c) rotor frequency when rotor runs at 600 rpm.

(b) Explain the working of two phase servo motor and their application.

(c) Explain the following :

- (i) Synchronizing of alternators
- (ii) V-curve of synchronous motor

3 Attempt any two of the following :  $10 \times 2 = 20$

- (a) Compare open loop and closed loop system with suitable examples.

121413J

2

[Contd...

- (b) Obtain differential equation describing equivalent mechanical system of fig. 1 and draw the equivalent F-V analogy.

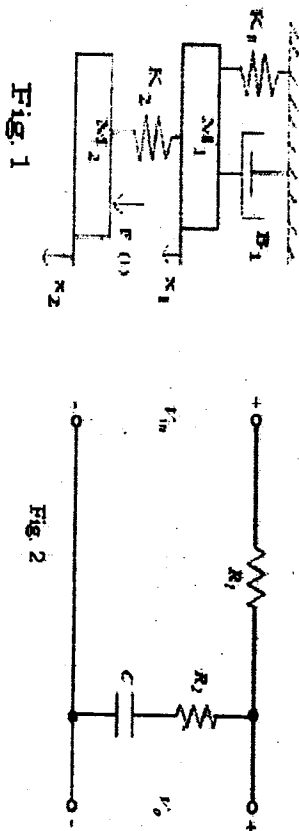


Fig. 1

Fig. 2

- (c) What do you mean by Transfer Function; find out Transfer Function for Fig. 2 circuit.

4 Attempt any two of the following ;  $10 \times 2 = 20$

- (a) Find out steady type error with unit step, ramp and parabolic input for

- (i) type zero
- (ii) type one
- (iii) type two system

- (b) (i) Explain bounded i/p bounded o/p stability criterion.
- (ii) Find stability condition for following characteristics equation

$$s^3 + 2ks^2 + (k+2)s + 4 = 0$$

121413J

3

[Contd...

- (c) Draw polar plot for  $G(s) = K / (sA + 1)(sB+1)$  for unity feedback system, find Gain margin, phase margin.

5 Attempt any two of the following : 10×2=20

- (a) Draw bode plot and determine G.M., P.M., comment on stability.

$$G(s) H(s) = 16 (1+0.5s) / s^2 * (1+0.125s) * (1+0.1s)$$

- (b) Explain the Proportional, Derivate, Integral controller and write their advantages.

- (c) construct root locus for

$$G(s) H(s) = k/s * (s+4) * (s+5) \quad K > 0$$