

Code: 15A01303

B.Tech II Year I Semester (R15) Supplementary Examinations June 2018

**STRENGTH OF MATERIALS – I**

(Civil Engineering)

Time: 3 hours

Max. Marks: 70

**PART – A**  
 (Compulsory Question)

\*\*\*\*\*

- 1 Answer the following: (10 X 02 = 20 Marks)
- Define factor of safety?
  - Define resilience.
  - What do you mean by point of contra flexure?
  - For a cantilever beam where the maximum bending moment occurs.
  - What are the assumptions in simple bending?
  - Write down the formula to find the section modulus of rectangular section.
  - Why the deflection is to be considered in the design?
  - Write down Mohr's theorems.
  - What is the basic concept of conjugate beam method?
  - Define core of a section.

**PART – B**

(Answer all five units, 5 X 10 = 50 Marks)

**UNIT – I**


- 2 A mild steel bar 20 mm diameter and 400 mm long is enclosed in a copper tube of 50 mm outside diameter and 25 mm inside diameter. The composite bar is heated through 50°C. Determine the stresses induced in each metal. Determine also the extension of the composite bar. Hence calculate the axial thrust P required to nullify the extension. The elastic modulus and coefficient of thermal expansion for steel are 200 GPa and  $11.7 \times 10^{-6}$  per °C respectively and for copper 70 GPa and  $21.6 \times 10^{-6}$  per °C respectively.

OR

- 3 A 1 m long bar of rectangular cross section 50 x 80 mm is subjected to an axial load of 1.2 kN. Write the maximum stress and strain energy developed in the bar if the load applied is: (i) Gradual. (ii) Sudden. (iii) Falls through a height of 25 mm. Take E = 205 GPa.


**UNIT – II**

- 4 Determine the bending moment and shear force values for the given beam and draw the BMD and SFD.

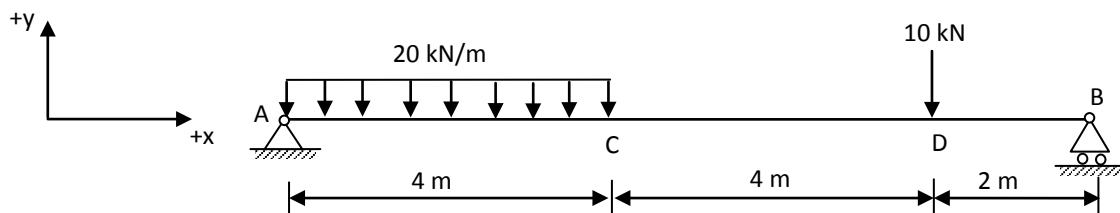

OR

- 5 Determine the bending moment and shear force values for the given beam and draw the BMD and SFD.

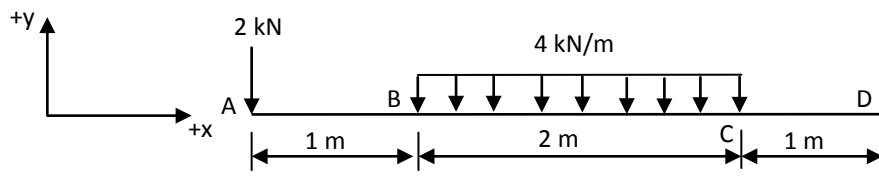

Contd. in page 2

Code: 15A01303

**UNIT – III**

- 6 A cantilever beam, 50 mm wide by 150 mm high and 6 m long, carries a load that varies uniformly from zero at the free end to 1000 N/m at the wall: (i) Compute the magnitude and location of the maximum flexural stress. (ii) Determine the type and magnitude of the stress in a fiber 20 mm from the top of the beam at a section 2 m from the free end.

**OR**

- 7 Derive the expression for the shear stress distribution for a circular section.

**UNIT – IV**

- 8 A simple beam of span 4 m is loaded uniformly with 40 kN/m for the third quarter of the span from the left end. Using Macaulay's approach, determine the maximum deflection.  $E = 2 \times 10^5$  MPa and  $I = 5 \times 10^7$  mm<sup>4</sup>.

**OR**

- 9 An overhanging beam of span 'l' and a single overhang 'a' is loaded uniformly with w/unit length throughout. Determine the deflection at the free end by moment area method.

**UNIT – V**

- 10 Determine the deflection of the simply supported beam AB of length 9m carrying two point loads 30 kN and 50 kN at a distance of 3 m and 7 m respectively from the left support using conjugate beam method.

**OR**

- 11 A masonry chimney 20 m high of uniform circular section, 5 m external diameter and 3 m internal diameter has to withstand a horizontal wind pressure of intensity 2 kN/m<sup>2</sup> of the projected area. Find the maximum and minimum stress intensities at the base. Take unit weight of masonry as 21 kN/m<sup>3</sup>.

\*\*\*\*\*

www.FirstRanker.com