

Printed Pages : 4

209/232

EEE-502/NEE-503

(Following Paper ID and Roll No. to be filled in your Answer Book)

Paper ID : 121522/121503

Roll No.

B.Tech.

(SEM. V) THEORY EXAMINATION, 2015-16

**CONTROL SYSTEM**

Time : 3 hours]

[Maximum Marks : 100

**Section-A****Note :** Attempt all sections. All sections carry **equal** marks.

Write answer of each part in short. (2×10=20)


- Explain open loop and closed system with physical examples.
- State the necessary & sufficient condition of Routh Hurwitz criterion.
- Explain the significances of constant M & N circles.
- What is the need of compensation in control system?
- Draw the polar plot of open loop transfer function


$$\frac{1}{s^2}$$

11000

(1)

P.T.O.

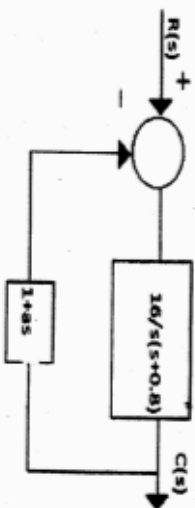


- (f) What are state and state variables?
- (g) Consider the system as shown in Fig. Determine the value of 'a' such that the damping ratio is 0.5.
- 
- (h) Define Rise time & Delay time for second order control system.
- (i) Explain Mason's gain formula.
- (j) Define the term Centroid & Break Away point.

## Section-B

**Note:** Attempt any five questions of the following

(10×5=50)

2. Determine the transfer function  $C(s)/R(s)$  for the block diagram shown in Fig. below

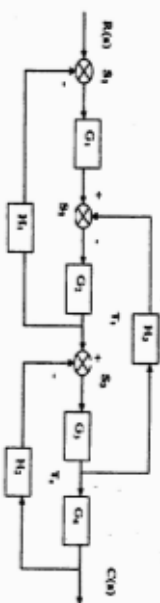

3. Derive the expression for step response of second order control system for under-damped.
4. Using Routh's stability criterion, determine the range of  $K$  open loop transfer function

$$G(s)H(s) = \frac{K}{s(s+1)(1+2s)}$$

5. Construct Root loci for open loop transfer function:

$$G(s)H(s) = \frac{K}{s(s+1)(s+3)}$$

6. Derive expression for resonant frequency and resonant peak for second order control system.
7. Sketch the Nyquist plot for the system with open loop transfer function

$G(s)H(s) = \frac{60}{(s+1)(s+2)(s+5)}$  and comment on stability.

8. Write short notes on PD controller and Synchros.
9. Obtain state equation of a given transfer function"

$$a) \quad \frac{Y(s)}{U(s)} = \frac{1}{s^3 + 2s^2 + 3s + 1}$$

$$b) \quad \frac{Y(s)}{U(s)} = \frac{1}{(s+1)(s+4)}$$

1100

(2)

EEE-502/NEE-503

1100

(3)

P.T.O

**Section-C**

**Note:** Attempt any two questions of the following.

(15×2=30)

10. For a unity feedback system, the open loop transfer function is

$$G(s)H(s) = \frac{2(s+0.25)}{s^2(s+1)(s+0.5)}$$

Draw Bode Plot and determine gain margin, phase margin,

$\omega_{gc}$  and  $\omega_{pc}$ .

11. A system characterised by the transfer function

$$\frac{Y(s)}{U(s)} = \frac{2}{s^3 + 6s^2 + 11s + 6}$$
 Find the state and output

equation in matrix form and also test the controllability and observability of the given system.

12. Write short notes of the following:

- (a) Lead compensator
- (b) Lag compensator
- (c) Gain Margin and Phase Margin

—x—

11000

(4)

EEE-502/NEE-503