

Code No: 115DU

R13

JAWAHARLAL NEHRU TECHNOLOGICAL UNIVERSITY HYDERABAD

B. Tech III Year I Semester Examinations, May - 2018

CONTROL SYSTEMS ENGINEERING

(Electronics and Communication Engineering)

Time: 3 hours

Max. Marks: 75

Note: This question paper contains two parts A and B.

Part A is compulsory which carries 25 marks. Answer all questions in Part A. Part B consists of 5 Units. Answer any one full question from each unit. Each question carries 10 marks and may have a, b, c as sub questions.

PART - A

(25 Marks)

- 1.a) What are the feed-back characteristics? [2]
- b) State and write the Mason's gain formula. [3]
- c) What are the time domain specifications? [2]
- d) What are the demerits of static error coefficient method? [3]
- e) What is the concept of stability? [2]
- f) States the Routh's stability criterion? [3]
- g) States the Nyquist stability criterion. [2]
- h) What is meant by Compensation in control systems? [3]
- i) States the properties of STM. [2]
- j) What are the merits of state variable technique? [3]

PART - B

(50 Marks)

- 2.a) What do you mean by a block diagram? What is meant by summing point and takeoff point? List the merits of block diagram representation.
- b) Determine the transfer function of the system given in below figure 1. [5+5]

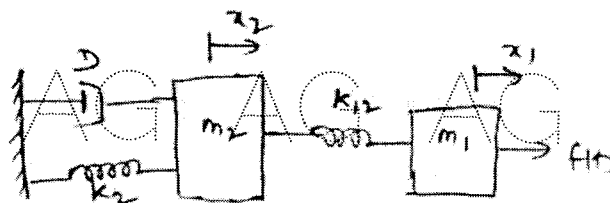


Figure 1

OR

- 3.a) Compare the open loop and closed loop control systems
- b) Using block diagram reduction technique find the transfer function for the system shown in below figure 2. [5+5]

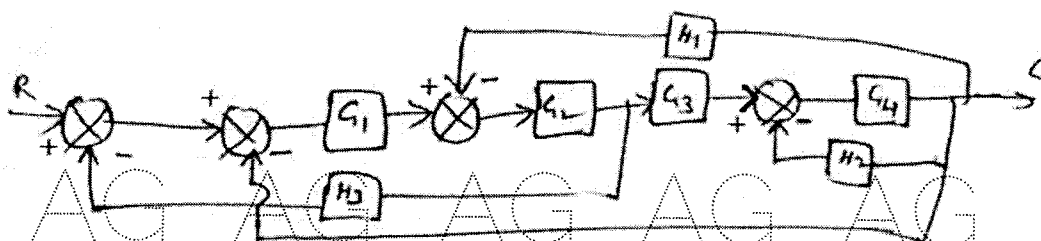


Figure 2

4.a) Derive the expression for response of second order system with unit step input.

b) For a negative feedback control system $G(s) = \frac{8}{s(0.2s+1)}$ and $H(s) = \frac{3}{s+2}$. Using generalized error series determine the steady state error of the system when the input applied is $r(t) = 1+2t+5t^2$. [5+5]

OR

5.a) What is meant by step input, ramp input and impulse input? How do you represent them graphically?

b) A unity feedback control system has an open loop transfer function $G(s) = \frac{7}{s(s+2)}$. Determine the time domain specifications for a step input of 10 units. [5+5]

6.a) Describe the effects of adding poles and zeros to $G(s)$, $H(s)$ on the root loci with necessary diagrams.

b) Determine the stability of a closed loop control system whose characteristic equation is $s^5 + 3s^4 + 2s^3 + 6s^2 + 6s + 9 = 0$ [5+5]

OR

7. For a unity feedback system, the open loop transfer function is

$$G(s) = \frac{k}{s(s+1)(s^2+4s+13)}$$

Sketch the root locus and find the value of k to maintain the stability. [10]

8. Sketch the bode plot and determine the following:

- Gain cross over frequency,
- Phase cross over frequency,
- Gain margin
- Phase margin.

For the transfer function is given $G(s) = \frac{8}{s(s+3)(s+5)}$. [10]

OR

9. A unit feedback system has an open loop transfer function $G(s) = \frac{k}{s(s+4)(s+2)}$. Design a phase lag compensator to meet the specifications, velocity error constant = 7 and phase margin $\geq 35^\circ$. [10]

10.a) Write the general procedure to determine the state space models of a control system.

b) A system is described by

$$\begin{bmatrix} \dot{x}_1 \\ \dot{x}_2 \end{bmatrix} = \begin{bmatrix} 1 & -1 \\ 2 & -3 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \end{bmatrix} + \begin{bmatrix} 1 \\ 0 \end{bmatrix} u, \quad y = \begin{bmatrix} 1 & 0 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \end{bmatrix}$$

Check the controllable and observability of the system. [5+5]

OR

11. The state variable formulation of a system is given by

$$\begin{bmatrix} \dot{x} \end{bmatrix} = \begin{bmatrix} -2 & 1 \\ -1 & 0 \end{bmatrix} \begin{bmatrix} x \end{bmatrix} + \begin{bmatrix} 0 \\ 1 \end{bmatrix} u \text{ and } y = \begin{bmatrix} 1 & 0 \end{bmatrix} \begin{bmatrix} x \end{bmatrix}. \text{ Determine the following}$$

- Transfer function of the system
- State transition matrix and
- State equation for a unit step input under zero initial condition.

[10]

---ooOoo---