

Code No: R1631023

R16
SET - 1
III B. Tech I Semester Regular Examinations, October/November - 2018
SIGNALS AND SYSTEMS

(Electrical and Electronics Engineering)

Time: 3 hours

Max. Marks: 70

 Note: 1. Question Paper consists of two parts (**Part-A** and **Part-B**)


 2. Answer **ALL** the question in **Part-A**

 3. Answer any **FOUR** Questions from **Part-B**
PART -A

1. a) What is the condition for orthonormality? [2M]
- b) If $x(t) \xleftrightarrow{F} X(f)$, then find FT of $g(t) = x(2t)$. [2M]
- c) What is the minimum sampling rate required to sample the signal $x(t) = 5 \cos(\pi 500t) + 15 \sin(\pi 1000t)$ [2M]
- d) Draw the magnitude response of ideal band stop filter. [3M]
- e) What is the relation between Laplace transform and Fourier transform of a signal? [3M]
- f) Find the z-transform of $x[n] = \left(\frac{1}{4}\right)^n u(-n-1)$? [2M]

PART -B

2. a) Find the even and odd parts of the signal shown in Figure. [7M]

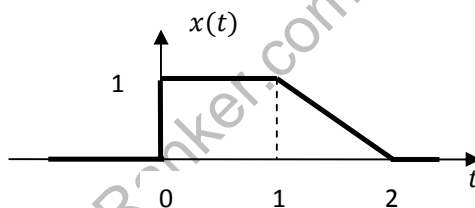

- b) Show that the unit impulse function is the derivative of unit step function. [7M]
3. a) State and prove the time-convolution property of Fourier transform. [7M]
- b) A periodic signal is defined over one period as $x_p(t) = \sin(\pi t); 0 < t < 1$ [7M]
 - i) Plot $x_p(t)$
 - ii) Obtain Fourier series representation of $x_p(t)$
- 4 State and prove sampling theorem for band-limited signals. [14M]
5. a) State and prove Parseval's theorem. [7M]
- b) Find the convolution of two signals $x(t) = u(t-1) - u(t+1)$ and $h(t) = e^{-at}u(t), a > 0$. [7M]
6. a) Find the Laplace transform of $x(t) = e^{-at}u(t), a > 0$ and plot its ROC. [7M]
- b) State and prove the convolution property of Laplace transform. [7M]
7. a) State and prove the final-value theorem of z-transform. [7M]
- b) Find the inverse z-transform of $X(z) = \frac{1}{1+z}$ with ROC $|z| < 1$. [7M]

SET - 2

Code No: R1631023

R16
SET - 3
III B. Tech I Semester Regular Examinations, October/November - 2018
SIGNALS AND SYSTEMS

(Electrical and Electronics Engineering)

Time: 3 hours

Max. Marks: 70

 Note: 1. Question Paper consists of two parts (**Part-A** and **Part-B**)

 2. Answer **ALL** the question in **Part-A**

 3. Answer any **FOUR** Questions from **Part-B**
PART -A

1. a) Evaluate the integral: $\int_{-\infty}^{\infty} \cos(200t)\delta(t - t_0)dt$ [2M]
- b) State the time-integration property of FT. [2M]
- c) Define Nyquist interval. [2M]
- d) What is the relation between rise time and bandwidth of a linear system? [3M]
- e) Find the final value of $f(t)$ with $F(s) = \frac{10}{s+10}$. [3M]
- f) Draw the ROC of $X(z)$ if $x[n] = \left(\frac{1}{8}\right)^n u[n]$. [2M]

PART -B

2. a) Define the following and give one example for each: [7M]
 i) Random signal ii) Deterministic signal iii) Multi channel signal
- b) Determine whether the signal $x(t) = (\cos(2\pi t))^2$ is periodic. If it is periodic, find the fundamental period. [7M]
3. a) Use differentiation-in-time and differentiation-in-frequency properties to find [7M]
 the Fourier transform of the Gaussian pulse, $(t) = \left(\frac{1}{\sqrt{2\pi}}\right)e^{-\frac{t^2}{2}}$.
- b) Find the Hilbert transform of the signal $x(t) = \cos(2\pi t)$. [7M]
4. a) Define the following: [7M]
 i) Under sampling ii) Over sampling iii) Critical sampling
- b) Compare natural sampling and flat top sampling. [7M]
5. a) A signal is given by $x(t) = u(t) - u(t - 1)$. Convolve $x(t)$ with itself and plot [7M]
 the result.
- b) Draw the ideal filter characteristics. What is the condition for realizability of [7M]
 these filters?
6. a) Find the inverse Laplace transform of [7M]
 i) $X(s) = \frac{1}{s+2}$ with ROC $Re(s) > -2$
 ii) $X(s) = \frac{1}{(s+2)(s+3)}$ with ROC $Re(s) > -2$
- b) List the properties of ROC for Laplace transforms [7M]
7. a) State and prove the convolution property of z-transform. [7M]
- b) State and prove time-advance property of z-transform. [7M]



SET - 4