

Code: 9A01701

R09

B.Tech IV Year I Semester (R09) Supplementary Examinations June 2016

FINITE ELEMENT METHODS IN CIVIL ENGINEERING


(Civil Engineering)

Time: 3 hours


Max. Marks: 70

Answer any FIVE questions
All questions carry equal marks

- 1 (a) What are the merits and demerits of finite element methods?
(b) Discuss the minimization concept of total potential energy.
- 2 (a) Define plane stress and plane strain with suitable examples.
(b) Explain about axisymmetric revolution of loading with a neat sketch.
- 3 (a) Derive shape function for one dimensional element and state their characteristics.
(b) Determine the displacements and the support reactions for the stepped bar as shown below, $E_{\text{Aluminum}} = 70 \text{ GPa}$, $E_{\text{Brass}} = 105 \text{ GPa}$, $E_{\text{Steel}} = 200 \text{ GPa}$. Take all areas in mm^2 .

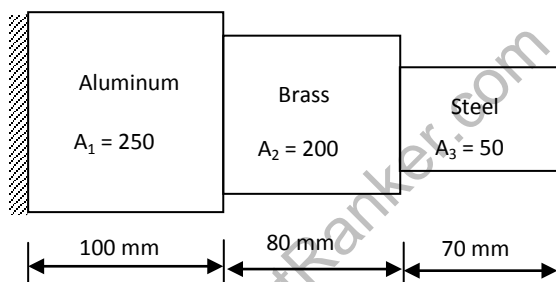

- 4 (a) What is geometric invariance?
(b) For a three noded triangular element, the temperatures are 80°C , 50°C and 40°C at the three nodes say 1, 2 and 3 nodes respectively. The nodal coordinates in the global system are $(x_1, y_1) = (2, 3)$, $(x_2, y_2) = (5, 7)$ and $(x_3, y_3) = (3, 9)$. Find the temperature at the point P (4, 6).
- 5 For the plane stress element shown in the figure below, the nodal displacements are $u_1 = 2.0 \text{ mm}$, $v_1 = 1.0 \text{ mm}$; $u_2 = 0.5 \text{ mm}$, $v_2 = 0.25 \text{ mm}$ and $u_3 = 3.5 \text{ mm}$, $v_3 = 1.5 \text{ mm}$, determine the element stresses. Let $E = 200 \text{ GPa}$, $\mu = 0.3$ and $t = 10 \text{ mm}$.

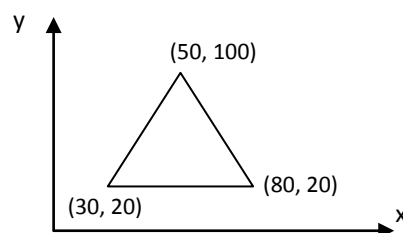


Cond. in page 2

R09

Code: 9A01701

- 6 (a) Differentiate between isoparametric, sub parametric and super parametric elements.
(b) Consider the iso-parametric quadrilateral with the nodes 1, 2, 3 and 4 at (15, 0), (17, 12), (7, 10) and (6, 2) respectively, which has local coordinates are (0, 0). Compute the Jacobian matrix.
- 7 For the given plane stress axis-symmetric element as shown below, determine stiffness matrix. Take $E = 210 \text{ GPa}$ and $\mu = 0.3$.

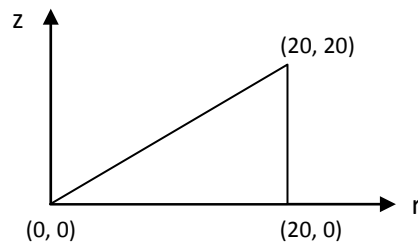

- 8 Write short notes on the following:
(a) Static condensation.
(b) Solution technique for static loads.

www.FirstRanker.com